

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 23 TOWNSHIP 17 RANGE 4

DATE: 10-05-03

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Copperweld w/cut 'x'

METHOD OF ESTABLISHMENT: County: 3-7-97



IN. S.P.C. E ZONE NAD '83

NAME: 17042305

N: 517062.1155(m)

E: 67916.7199(m)

NOTE: This corner position represents a title corner and may not necessarily be in the position of the Record corner.

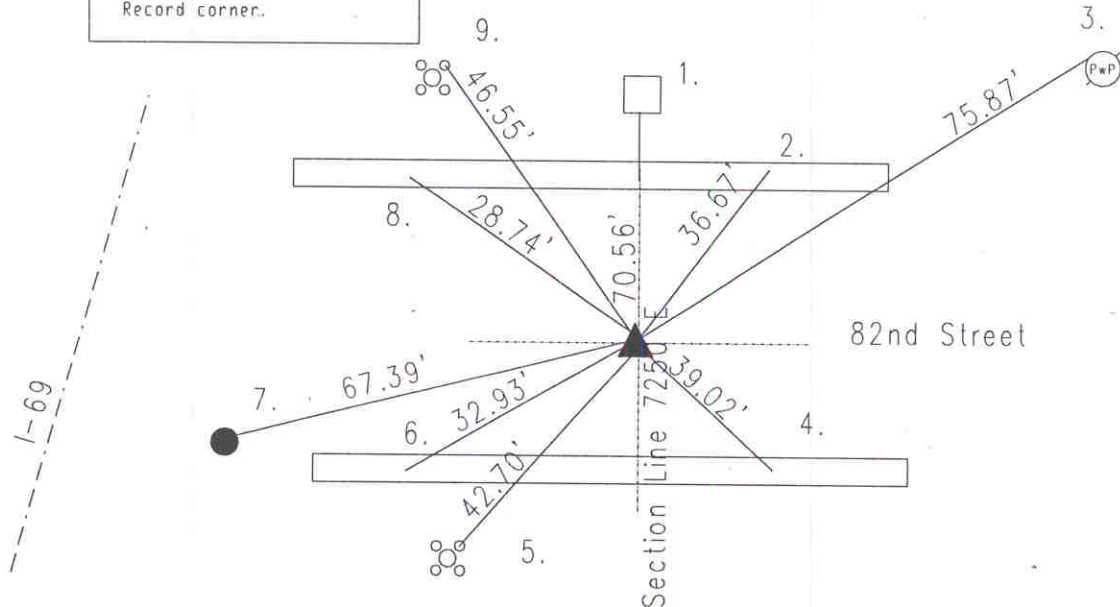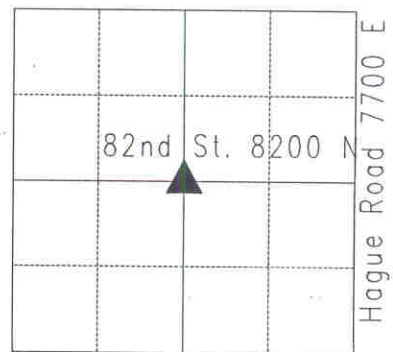

Survey by Fatout 6-29-1882 called no stone but witness: 6" hickory N 8 E 89 links, 8" hickory N 50 1/2 E 77 links per Lawrence Township Legal Survey Book pg. 50. MCSO 1953 called iron bolt. Monroe 5-9-56 called a nail & washer over stone. Monroe 5-5-60 called same. Wilcoxon 4-23-76 called brass plug. Wilcoxon 10-28-93 called same. Excavated 10-25-96 by Wilcoxon and copperweld set in position of the brass plug in accordance with the 82nd Street Construction Project. Re-tied 3-7-97. Harrison set. Re-tied 10-05-03. 17042305

REF.	DISTANCE	DESCRIPTION
1.	70.56'	Due N to drilled hole in top of R/W marker
2.	36.67'	Cut 'x' in crub
3.	75.87'	Mag nail w/brass washer NW PwP no# 55"up
4.	39.02'	Cut 'x' in crub
5.	42.70'	Cut 'x' NE bolt highway sign
6.	32.93'	Cut 'x' in crub
7.	67.39'	Witness Harrison
8.	28.74'	Cut 'x' in crub
9.	46.55'	cut 'x' NE-bolt of highway sign